






Car-Topper Signs User Guide

FLYER™ Sign

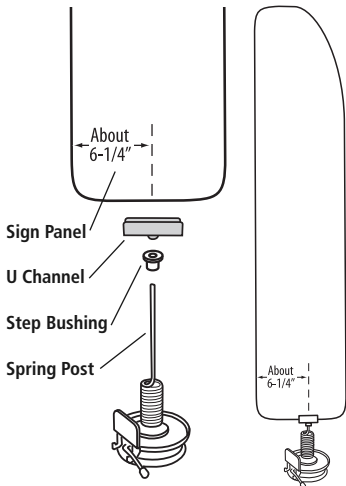

- Attach **Super Sucker® FLYER™** base to a clean vehicle roof by placing unit flat on car and then flipping the lever to engage the suction cup. Best results are obtained when both the suction cup and roof are wiped with a clean wet cloth to remove debris and dirt prior to attachment.
- **Super Sucker® FLYER™** base can be applied in any position on roof or trunk. The best position is in the center to keep the moving sign as far away from people as possible.
- Slide **Step Bushing** onto **Spring Post** with flange side up, then slide black **“U” Channel Bushing** onto post. These units support the sign panel and allow the sign to spin freely.
- Slide the sign onto the post using a hole 1-2 holes away from the center, toward the shorter sail side of the sign panel to insure that the sign will catch the wind. The closer the post is to the center hole the more wind it will take to spin the sign.
- Check the **Super Sucker® FLYER™** hold on the car after attaching sign and make sure the spring assembly is tight on the base. It may require a turn to tighten it.
- If leaving **Super Sucker® FLYER™** on vehicle for extended period check hold every few days and reattach if necessary.
- **DO NOT DRIVE** with **Super Sucker® FLYER™** attached to vehicle.

Car-Topper™ Sign (Ready4Graphics or Message Board)

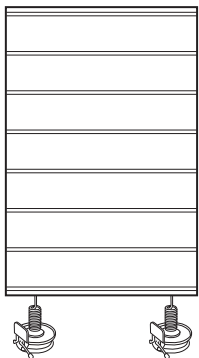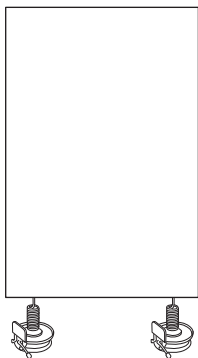

- Attach the 2 **Super Sucker® Car-Topper™** bases to a clean vehicle roof by placing units flat on car and then flipping the levers to engage the suction cups. Make sure the rods are 18” apart for the Message Board models so they line up with the pre-drilled holes in the sign panel. Best results are obtained when both the suction cups and roof are wiped with a clean wet cloth to remove debris and dirt prior to attachment.
- **Super Sucker® Car-Topper™** bases can be applied in any position on roof or trunk. The most common sign positions are across the car or down the center of the car.
- **DO NOT DRIVE** with **Super Sucker® Car-Topper™** attached to vehicle.
- **NOTE – Super Sucker® Car-Topper™** bases are designed to hold 8mm and 10mm corrugated plastic with flutes running in the vertical (up-down) direction. When using 10mm material use plastic sleeve supplied on spring extension. Remove plastic sleeve from spring extension when using 8mm material.

Helpful Hints

- Ready4Graphics sign faces are easily decorated with vinyl graphics or large format digital images.
- Keep copy and design simple for maximum impact.
- Make extra sign panels and change message periodically to keep message fresh.

CAUTION

- **Super Sucker® Car-Topper™** base must be mounted to a flat, clean, smooth, non-porous surface.
- **Super Sucker® Car-Topper™** bases are designed for winds up to 30 mph. In the event of higher winds remove unit from rooftop.
- **Super Sucker® Car-Topper™** bases should be removed at night or when the business is closed to avoid vandalism or theft.
- Store **Super Sucker® Car-Topper™** bases flat to protect suction cup surface.